

タイ・フレックス® (TF-80W) K形

FCD製 伸縮可とう管



ダブル型


離脱防止性能A級
(3DkN 以上)
ノンボルトで軽量・コンパクト

呼び径	接合形式	価格 (円)			
		偏心量100mm	偏心量200mm	偏心量300mm	偏心量400mm
50	F×F	165,000	202,000	239,000	
75	F×F	262,000	317,000	372,000	427,000
	F×U	267,000	322,000	377,000	432,000
	F×S	259,000	314,000	369,000	424,000
	U×U	272,000	327,000	382,000	437,000
	U×S	264,000	319,000	374,000	429,000
	S×S	256,000	311,000	366,000	421,000
100	F×F	332,000	404,000	476,000	548,000
	F×U	334,000	406,000	478,000	550,000
	F×S	322,000	394,000	466,000	538,000
	U×U	336,000	408,000	480,000	552,000
	U×S	324,000	396,000	468,000	540,000
	S×S	312,000	384,000	456,000	528,000
150	F×F	494,000	602,000	710,000	818,000
	F×U	496,000	604,000	712,000	820,000
	F×S	476,000	584,000	692,000	800,000
	U×U	498,000	606,000	714,000	822,000
	U×S	478,000	586,000	694,000	802,000
	S×S	458,000	566,000	674,000	782,000
200	F×F	616,000	763,000	910,000	1,057,000
	F×U	632,000	779,000	926,000	1,073,000
	F×S	616,000	763,000	910,000	1,057,000
	U×U	648,000	795,000	942,000	1,089,000
	U×S	632,000	779,000	926,000	1,073,000
	S×S	616,000	763,000	910,000	1,057,000
250	F×F	770,000	953,000	1,136,000	1,319,000
	F×U	778,000	961,000	1,144,000	1,327,000
	F×S	760,000	943,000	1,126,000	1,309,000
	U×U	786,000	969,000	1,152,000	1,335,000
	U×S	768,000	951,000	1,134,000	1,317,000
	S×S	750,000	933,000	1,116,000	1,299,000
300	F×F	866,000	1,086,000	1,306,000	1,526,000
	F×U	887,000	1,107,000	1,327,000	1,547,000
	F×S	838,000	1,058,000	1,278,000	1,498,000
	U×U	908,000	1,128,000	1,348,000	1,568,000
	U×S	859,000	1,079,000	1,299,000	1,519,000
	S×S	810,000	1,030,000	1,250,000	1,470,000

F=フランジ、U=受口 (K形)、S=挿し口 (K形、T形)

※上記価格には接合用附属品は含んでおりません。

タイ・フレックス® (TF-80W) K形

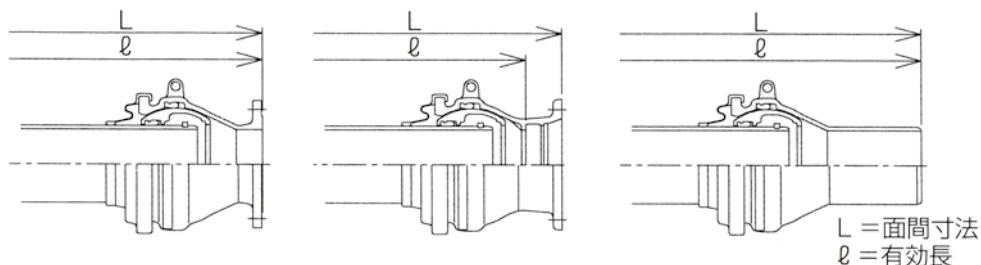

呼び径	接合形式	寸法 (mm)							
		偏心量100mm		偏心量200mm		偏心量300mm		偏心量400mm	
		L	l	L	l	L	l	L	l
50	F×F	610	610	780	780	1,055	1,055		
75	F×F	600	600	880	880	1,150	1,150	1,430	1,430
	F×U	610	530	890	810	1,160	1,080	1,440	1,360
	F×S	700	700	980	980	1,250	1,250	1,530	1,530
	U×U	620	460	900	740	1,170	1,010	1,450	1,290
	U×S	710	630	990	910	1,260	1,180	1,540	1,460
	S×S	800	800	1,080	1,080	1,350	1,350	1,630	1,630
100	F×F	640	640	930	930	1,220	1,220	1,510	1,510
	F×U	660	580	950	870	1,240	1,160	1,530	1,450
	F×S	740	740	1,030	1,030	1,320	1,320	1,610	1,610
	U×U	680	520	970	810	1,260	1,100	1,550	1,390
	U×S	760	680	1,050	970	1,340	1,260	1,630	1,550
	S×S	840	840	1,130	1,130	1,420	1,420	1,710	1,710
150	F×F	690	690	1,000	1,000	1,300	1,300	1,610	1,610
	F×U	700	620	1,010	930	1,310	1,230	1,620	1,540
	F×S	840	840	1,150	1,150	1,450	1,450	1,760	1,760
	U×U	710	550	1,020	860	1,320	1,160	1,630	1,470
	U×S	850	770	1,160	1,080	1,460	1,380	1,770	1,690
	S×S	990	990	1,300	1,300	1,600	1,600	1,910	1,910
200	F×F	750	750	1,080	1,080	1,410	1,410	1,730	1,730
	F×U	760	680	1,090	1,010	1,420	1,340	1,740	1,660
	F×S	900	900	1,230	1,230	1,560	1,560	1,880	1,880
	U×U	770	610	1,100	940	1,430	1,270	1,750	1,590
	U×S	910	830	1,240	1,160	1,570	1,490	1,890	1,810
	S×S	1,050	1,050	1,380	1,380	1,710	1,710	2,030	2,030
250	F×F	800	800	1,150	1,150	1,500	1,500	1,850	1,850
	F×U	800	720	1,150	1,070	1,500	1,420	1,850	1,770
	F×S	950	950	1,300	1,300	1,650	1,650	2,000	2,000
	U×U	800	640	1,150	990	1,500	1,340	1,850	1,690
	U×S	950	870	1,300	1,220	1,650	1,570	2,000	1,920
	S×S	1,100	1,100	1,450	1,450	1,800	1,800	2,150	2,150
300	F×F	860	860	1,240	1,240	1,610	1,610	1,980	1,980
	F×U	890	780	1,270	1,160	1,640	1,530	2,010	1,900
	F×S	1,010	1,010	1,390	1,390	1,760	1,760	2,130	2,130
	U×U	920	700	1,300	1,080	1,670	1,450	2,040	1,820
	U×S	1,040	960	1,420	1,310	1,790	1,680	2,160	2,050
	S×S	1,160	1,160	1,540	1,540	1,910	1,910	2,280	2,280

※呼び径75～300のL=面間寸法、l=有効長は、7.5K・10Kフランジ仕様の寸法です。

16K・20Kフランジ仕様のL、lはお問い合わせ願います。

※呼び径50の図はP164をご参照ください。

タイ・フレックス® (TF-80W) K形

FCD製 伸縮可とう管



ダブル型

離脱防止性能A級


(3DkN 以上)

ノンボルトで軽量・コンパクト

呼び径	接合形式	価格 (円)			
		偏心量100mm	偏心量200mm	偏心量300mm	偏心量400mm
350	F×F	1,053,000	1,309,000	1,565,000	1,821,000
	F×U	1,086,000	1,342,000	1,598,000	1,854,000
	F×S	1,031,000	1,287,000	1,543,000	1,799,000
	U×U	1,119,000	1,375,000	1,631,000	1,887,000
	U×S	1,064,000	1,320,000	1,576,000	1,832,000
	S×S	1,009,000	1,265,000	1,521,000	1,777,000
400	F×F	1,434,000	1,728,000	2,022,000	2,316,000
	F×U	1,464,000	1,758,000	2,052,000	2,346,000
	F×S	1,381,000	1,675,000	1,969,000	2,263,000
	U×U	1,494,000	1,788,000	2,082,000	2,376,000
	U×S	1,411,000	1,705,000	1,999,000	2,293,000
	S×S	1,328,000	1,622,000	1,916,000	2,210,000
450	F×F	1,833,000	2,164,000	2,495,000	2,826,000
	F×U	1,869,000	2,200,000	2,531,000	2,862,000
	F×S	1,791,000	2,122,000	2,453,000	2,784,000
	U×U	1,905,000	2,236,000	2,567,000	2,898,000
	U×S	1,827,000	2,158,000	2,489,000	2,820,000
	S×S	1,749,000	2,080,000	2,411,000	2,742,000
500	F×F	2,039,000	2,407,000	2,775,000	3,143,000
	F×U	2,094,000	2,462,000	2,830,000	3,198,000
	F×S	2,018,000	2,386,000	2,754,000	3,122,000
	U×U	2,149,000	2,517,000	2,885,000	3,253,000
	U×S	2,073,000	2,441,000	2,809,000	3,177,000
	S×S	1,997,000	2,365,000	2,733,000	3,101,000
600	F×F	2,651,000	3,094,000	3,537,000	3,980,000
	F×U	2,702,000	3,145,000	3,588,000	4,031,000
	F×S	2,613,000	3,056,000	3,499,000	3,942,000
	U×U	2,753,000	3,196,000	3,639,000	4,082,000
	U×S	2,664,000	3,107,000	3,550,000	3,993,000
	S×S	2,575,000	3,018,000	3,461,000	3,904,000
700	F×F		5,308,000	5,825,000	6,342,000
	F×U		5,396,000	5,913,000	6,430,000
	F×S		5,254,000	5,771,000	6,288,000
	U×U		5,484,000	6,001,000	6,518,000
	U×S		5,342,000	5,859,000	6,376,000
	S×S		5,200,000	5,717,000	6,234,000
800	F×F		6,159,000	6,753,000	7,347,000
	F×U		6,274,000	6,868,000	7,462,000
	F×S		6,086,000	6,680,000	7,274,000
	U×U		6,389,000	6,983,000	7,577,000
	U×S		6,201,000	6,795,000	7,389,000
	S×S		6,013,000	6,607,000	7,201,000

F=フランジ、U=受口 (K形)、S=挿し口 (K形)
 ※上記価格には接合用付属品は含んでおりません。

タイ・フレックス® (TF-80W) K形

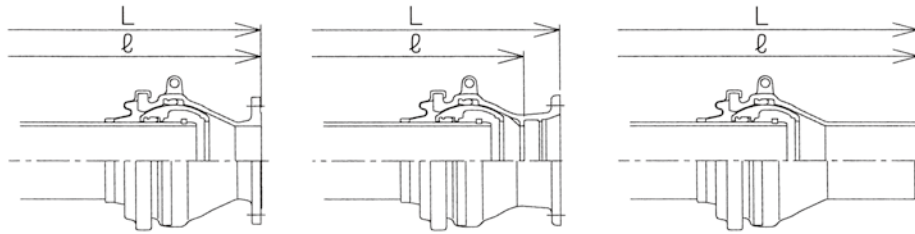

L = 面間寸法
e = 有効長

呼び径	接合形式	寸法 (mm)							
		偏心量100mm		偏心量200mm		偏心量300mm		偏心量400mm	
		L	e	L	e	L	e	L	e
350	F×F	1,060	1,060	1,380	1,380	1,760	1,760	2,130	2,130
	F×U	1,100	990	1,420	1,310	1,790	1,680	2,170	2,060
	F×S	1,240	1,240	1,560	1,560	1,930	1,930	2,310	2,310
	U×U	1,130	910	1,450	1,230	1,830	1,610	2,200	1,980
	U×S	1,270	1,160	1,590	1,480	1,970	1,860	2,340	2,230
	S×S	1,410	1,410	1,730	1,730	2,110	2,110	2,480	2,480
400	F×F	1,150	1,150	1,430	1,430	1,800	1,800	2,180	2,180
	F×U	1,180	1,070	1,460	1,350	1,840	1,730	2,210	2,100
	F×S	1,340	1,340	1,620	1,620	1,990	1,990	2,370	2,370
	U×U	1,220	1,000	1,500	1,280	1,870	1,650	2,250	2,030
	U×S	1,370	1,260	1,650	1,540	2,030	1,920	2,400	2,290
	S×S	1,530	1,530	1,810	1,810	2,180	2,180	2,560	2,560
450	F×F	1,190	1,190	1,460	1,460	1,830	1,830	2,210	2,210
	F×U	1,220	1,110	1,490	1,380	1,870	1,760	2,240	2,130
	F×S	1,370	1,370	1,640	1,640	2,020	2,020	2,390	2,390
	U×U	1,250	1,030	1,520	1,300	1,900	1,680	2,270	2,050
	U×S	1,400	1,290	1,670	1,560	2,050	1,940	2,420	2,310
	S×S	1,550	1,550	1,820	1,820	2,200	2,200	2,570	2,570
500	F×F	1,290	1,290	1,520	1,520	1,900	1,900	2,290	2,290
	F×U	1,320	1,210	1,550	1,440	1,930	1,820	2,320	2,210
	F×S	1,490	1,490	1,710	1,710	2,100	2,100	2,480	2,480
	U×U	1,350	1,130	1,580	1,360	1,960	1,740	2,350	2,130
	U×S	1,520	1,410	1,740	1,630	2,130	2,020	2,510	2,400
	S×S	1,680	1,680	1,910	1,910	2,290	2,290	2,680	2,680
600	F×F	1,370	1,370	1,570	1,570	1,960	1,960	2,340	2,340
	F×U	1,400	1,290	1,610	1,500	1,990	1,880	2,380	2,270
	F×S	1,560	1,560	1,760	1,760	2,150	2,150	2,530	2,530
	U×U	1,440	1,220	1,640	1,420	2,030	1,810	2,410	2,190
	U×S	1,590	1,480	1,800	1,690	2,180	2,070	2,570	2,460
	S×S	1,750	1,750	1,950	1,950	2,340	2,340	2,720	2,720
700	F×F			1,740	1,740	2,110	2,110	2,480	2,480
	F×U			1,770	1,650	2,140	2,020	2,510	2,390
	F×S			1,990	1,990	2,360	2,360	2,730	2,730
	U×U			1,800	1,560	2,170	1,930	2,540	2,300
	U×S			2,020	1,900	2,390	2,270	2,760	2,640
	S×S			2,240	2,240	2,610	2,610	2,980	2,980
800	F×F			1,940	1,940	2,210	2,210	2,590	2,590
	F×U			1,960	1,840	2,230	2,110	2,610	2,490
	F×S			2,180	2,180	2,450	2,450	2,830	2,830
	U×U			1,980	1,740	2,250	2,010	2,620	2,380
	U×S			2,200	2,080	2,470	2,350	2,840	2,720
	S×S			2,420	2,420	2,690	2,690	3,070	3,070


※呼び径350のL = 面間寸法、e = 有効長は、7.5K、10K フランジ仕様の寸法です。

※呼び径400以上のL = 面間寸法、e = 有効長は、7.5K フランジ仕様の寸法です。

10K・16K・20K フランジ仕様のL、e はお問い合わせ願います。

タイ・フレックス® (TF-80W) K形

FCD製 伸縮可とう管

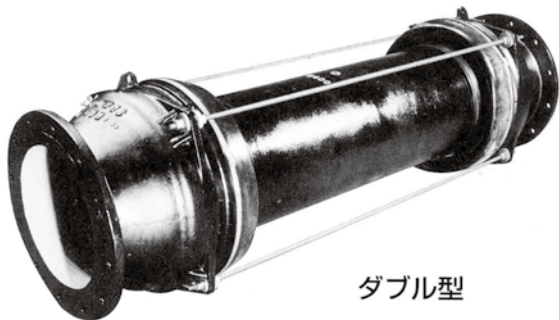

離脱防止性能A級
(3DkN 以上)
ノンボルトで軽量・コンパクト

ダブル型


呼び径	接合形式	価格 (円)		
		偏心量200mm	偏心量300mm	偏心量400mm
900	F×F	7,636,000	8,304,000	8,972,000
	F×U	7,824,000	8,492,000	9,160,000
	F×S	7,522,000	8,190,000	8,858,000
	U×U	8,012,000	8,680,000	9,348,000
	U×S	7,710,000	8,378,000	9,046,000
	S×S	7,408,000	8,076,000	8,744,000
1000	F×F	11,790,000	12,536,000	13,282,000
1100	F×F			16,382,000
1200	F×F			19,820,000
1350	F×F			24,919,000
1500	F×F			28,647,000

F=フランジ、U=受口 (K形)、S=挿し口 (K形)

※上記価格には接合用附属品は含んでおりません。

※呼び径1000以上のU= (受口)、S= (挿し口) についてはお問い合わせ願います。

タイ・フレックス® (TF-80W) K形

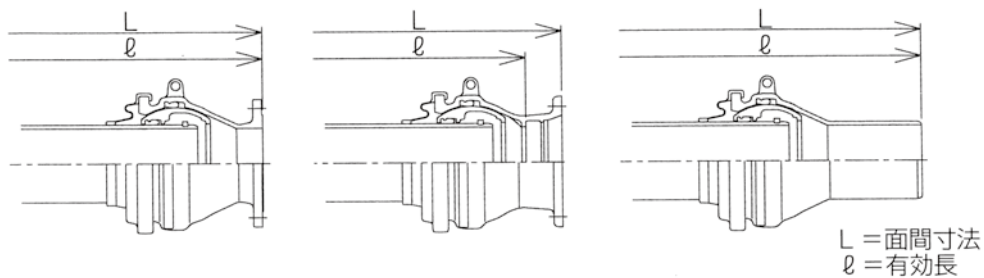

呼び径	接合形式	寸法 (mm)					
		偏心量200mm		偏心量300mm		偏心量400mm	
		L	l	L	l	L	l
900	F×F	2,020	2,020	2,410	2,410	2,790	2,790
	F×U	2,020	1,900	2,410	2,290	2,790	2,670
	F×S	2,260	2,260	2,650	2,650	3,030	3,030
	U×U	2,020	1,780	2,410	2,170	2,790	2,550
	U×S	2,260	2,140	2,650	2,530	3,030	2,910
	S×S	2,500	2,500	2,890	2,890	3,270	3,270
1000	F×F	2,080	2,080	2,470	2,470	2,850	2,850
1100	F×F					3,150	3,150
1200	F×F					3,300	3,300
1350	F×F					3,400	3,400
1500	F×F					3,450	3,450

※L=面間寸法、l=有効長は、7.5Kフランジ仕様の寸法です。
10K・16K・20Kフランジ仕様のL、lはお問い合わせ願います。