



タイ・フレックス® (TF-80S) K形

FCD製 伸縮可とう管 シングル型

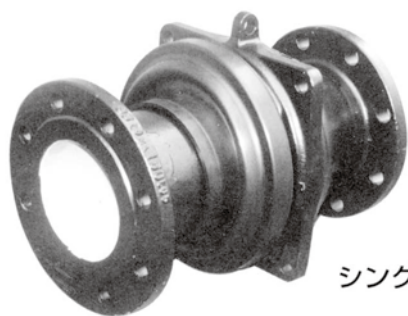

シングル型

離脱防止性能A級
(3DkN以上)
ノンボルトで軽量・コンパクト



L=面間寸法
φ=有効長

呼び径	接合形式	価格 (円)	寸法 (mm)	
			L	φ
75	F×F	168,000	350	350
	F×U	171,000	390	310
	F×S	156,000	430	430
	U×U	174,000	400	240
	U×S	159,000	440	360
	S×S	144,000	530	530
100	F×F	215,000	400	400
	F×U	219,000	440	360
	F×S	209,000	470	470
	U×U	223,000	460	300
	U×S	213,000	490	410
	S×S	203,000	580	580
150	F×F	332,000	450	450
	F×U	339,000	480	400
	F×S	309,000	520	520
	U×U	346,000	490	330
	U×S	316,000	530	450
	S×S	286,000	670	670
200	F×F	430,000	500	500
	F×U	439,000	530	450
	F×S	409,000	550	550
	U×U	448,000	540	380
	U×S	418,000	560	480
	S×S	388,000	700	700
250	F×F	536,000	550	550
	F×U	546,000	550	470
	F×S	510,000	570	570
	U×U	556,000	550	390
	U×S	520,000	570	490
	S×S	484,000	720	720
300	F×F	634,000	600	600
	F×U	636,000	600	490
	F×S	591,000	650	650
	U×U	638,000	630	410
	U×S	593,000	680	570
	S×S	548,000	800	800

呼び径	接合形式	価格 (円)	寸法 (mm)	
			L	φ
350	F×F	1,110,000	610	610
	F×U	1,120,000	690	580
	F×S	1,104,000	780	780
	U×U	1,130,000	730	510
	U×S	1,114,000	820	710
	S×S	1,098,000	960	960
400	F×F	1,401,000	660	660
	F×U	1,429,000	730	620
	F×S	1,395,000	810	810
	U×U	1,457,000	770	550
	U×S	1,423,000	850	740
	S×S	1,389,000	1,000	1,000
450	F×F	1,703,000	700	700
	F×U	1,783,000	760	650
	F×S	1,689,000	840	840
	U×U	1,863,000	790	570
	U×S	1,769,000	870	760
	S×S	1,675,000	1,020	1,020
500	F×F	1,931,000	790	790
	F×U	1,990,000	850	740
	F×S	1,920,000	910	910
	U×U	2,049,000	880	660
	U×S	1,979,000	940	830
	S×S	1,909,000	1,110	1,110
600	F×F	2,439,000	830	830
	F×U	2,545,000	880	770
	F×S	2,429,000	980	980
	U×U	2,651,000	920	700
	U×S	2,535,000	1,020	910
	S×S	2,419,000	1,170	1,170

※10K・16K・20Kフランジ仕様のL、φはお問い合わせ願います。

F=フランジ、U=受口 (K形)、S=挿し口 (K形、T形)
※GX形・NS形・SII形およびKF形についてはお問い合わせ願います。